



LIABILITY • ENERGY EFFICIENCY • GUARANTEE



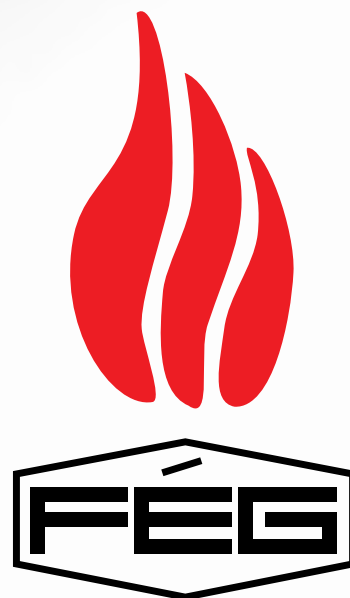

F8.60 ErP wall heater	2
F8.60 ErP Retro wall heater	2
GF26 ErP wall heater	6
GF36 ErP wall heater	6
Zeusz F8.50 ErP wall heater.....	8
Zeusz GF35 ErP wall heater	10
F8.50 ErP wall heater	12
GF35 ErP wall heater	14
GF40 ErP wall heater	14
GF25 ErP wall heater	16
GF30 ErP wall heater	16
EURO FK25 wall heater	18


F8.60EF ErP
WALL HEATER



Device model:	F8.60EF ErP	
Fuel	Natural gas	LP gas
Max. rated heat output (KW)	5.8	5.9
Efficiency (%):	94	93
Energy efficiencyclasss:	A	
Space heated (m3) :	80-140	
Height (mm):	725	
Depth (mm):	280+20*	
Width (mm):	770	
Weight (kg) :	28.5	
Gas connection:	G1/2"	
Flue outlet type:	direct vent	
Flue outlet diameter (mm):	97	
Material of combustion chamber:	steel	
Colours:	beige and white	




F8.60EF ErP RETRO
WALL HEATER



Device model:		F8.60EF ErP	
 Fuel		Natural gas	LP gas
 Max. rated heat output (KW)		5.8	5.9
 Efficiency (%)		94	93
 Energy efficiency classes:		A	
 Space heated (m3) :		80-140	
 Height (mm):		725	
 Depth (mm):		280+20*	
 Width (mm):		770	
 Weight (kg) :		28.5	
 Gas connection:		G1/2"	
 Flue outlet type:		direct vent	
 Flue outlet diameter (mm):		97	
 Material of combustion chamber:		steel	
 Colours:		beige and white	



GF26 ErP / GF36 ErP
WALL HEATER

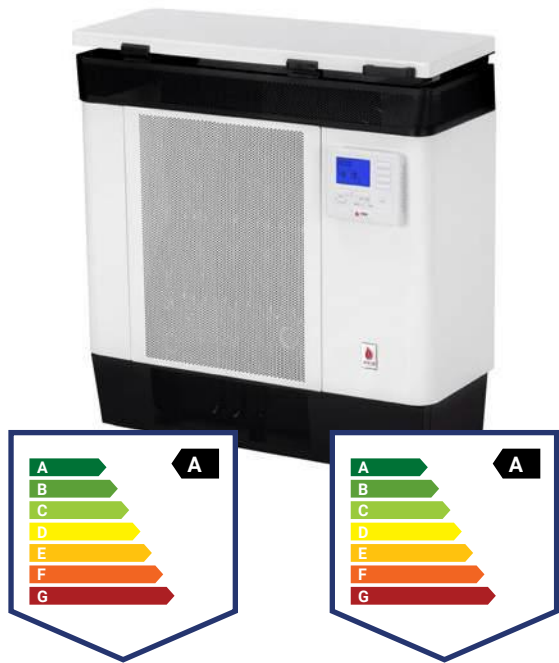

Device model:		GF26 ErP		GF36 ErP	
 Fuel		Natural gas	LP gas	Natural gas	LP gas
 Max. rated heat output (KW)		3.0	3.0	4	4
 Efficiency (%):		94	94	94	94
 Energy efficiency class:		A		A	
 Space heated (m3):		40-70		60-80	
 Height (mm)		710		710	
 Depth (mm)		345+20*			
 Width: (mm)		500		632	
 Weight (kg)		20		24	
 Gas connection		G1/2"			
 Flue outlet type		direct vent			
 Flue outlet diameter (mm)		97			
 Material of combustion chamber		steel			
 Colours		beige			

*Depth of thermostat



ZEUSZ F8.50 ErP
WALL HEATER



Device model:		ZEUSZ F8.50F ErP		ZEUSZ F8.50P ErP	
 Fuel		Natural gas	LP gas	Natural gas	LP gas
 Max . rated heat output (KW)		5.6	5.6	5.7	5.7
 Efficiency(%):		94	94	82	82
 Energy efficiency class:		B		C	
 Space heated (m3):		80-170			
 Height (mm)		710		720	
 Depth (mm)		371		450	
 Width: (mm)		840			
 Weight (kg)		34		32	
 Gas connection		G1/2"			
 Flue outlet type		direct vent		chimney	
 Flue outlet diameter (mm)		97		76	
 Material of combustion chamber		steel			
 Colours		white , black			




ZEUSZ GF35 ErP
WALL HEATER



Device model:		ZEUSZ GF35F ErP		ZEUSZ GF35P ErP	
 Fuel		Natural gas	LP gas	Natural gas	LP gas
 Max. rated heat output (KW)		4.0	4.0	3.6	3.7
 Efficiency(%):		93	93	84	84
 Energy efficiency class:		B		C	
 Space heated (m3):		60-80			
 Height (mm)		710		700	
 Depth (mm)		335		400	
 Width: (mm)		706			
 Weight (kg)		24		28.5	
 Gas connection		G1/2"			
 Flue outlet type		direct vent		chimney	
 Flue outlet diameter (mm)		97		76	
 Material of combustion chamber		steel			
 Colours		white, black			



F8.50 ErP
WALL HEATER

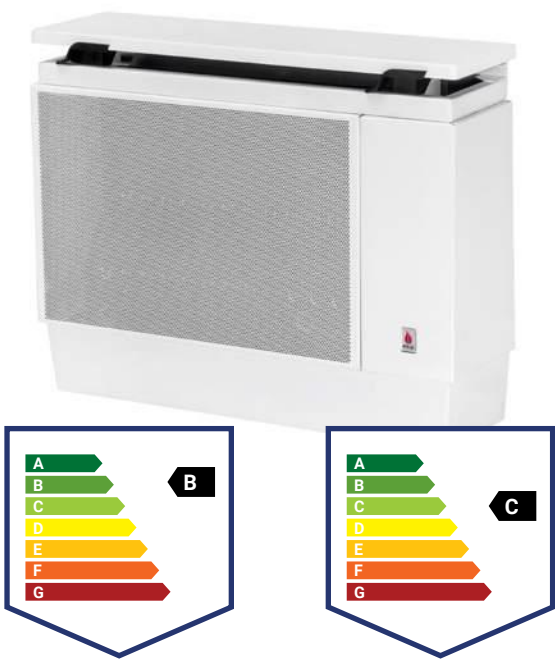

Device model:		F8.50F ErP		F8.50P ErP	
	Fuel	Natural gas	LP gas	Natural gas	LP gas
	Max. rated heat output (KW)	5.3	5.5	5.1	5.1
	Efficiency (%):	94	95	86	85
	Energy efficiency clas:	B		C	
	Space heated:	80-140			
	Height (mm)	710		710	
	Depth (mm)	280		385	
	Width: (mm)	770			
	Weight (kg)	28.5		25	
	Gas connection	G/2"			
	Flue outlet type	direct vent		chimney.	
	Flue outlet diameter (mm)	97		76	
	Material of combustion chamber	steel			
	Colours	beige			




GF35 ErP WALL HEATER



Device model:		GF35F ErP		GF35P ErP	
 Fuel		Natural gas	LP gas	Natural gas	LP gas
 Max. rated heat output (kW)		4.0	4.0	3.8	3.8
 Efficiency (%):		94	96	88	88
 Energy efficiency class:		B		C	
 Space heated (m3):		60-80			
 Height (mm)		700		660	
 Depth (mm)		310		395	
 Width: (mm)		630			
 Weight (kg)		24		24	
 Gas connection		G1/2"			
 Flue outlet type		direct vent		chimney	
 Flue outlet diameter (mm)		97		76	
 Material of cobustion chamber		steel			
 Colours		beige			

GF40 ErP WALL HEATER

Device model:		GF40F ErP		GF40P ErP	
 Fuel		Natural gas	LP gas	Natural gas	LP gas
 Max. rated heat output (kW)		3.9	4.0	3.8	3.8
 Efficiency (%):		94	96	88	85
 Energy efficiency class:		B		C	
 Space heated (m3):		60-80			
 Height (mm)		685		660	
 Depth (mm)		310		440	
 Width (mm)		630			
 Weight (kg)		44		44	
 Gas connection		G1/2"			
 Flue outlet type		direct vent		chimney	
 Flue outlet diameter (mm)		97		76	
 Material of combustion chamber		casting			
 Alapszín		beige			

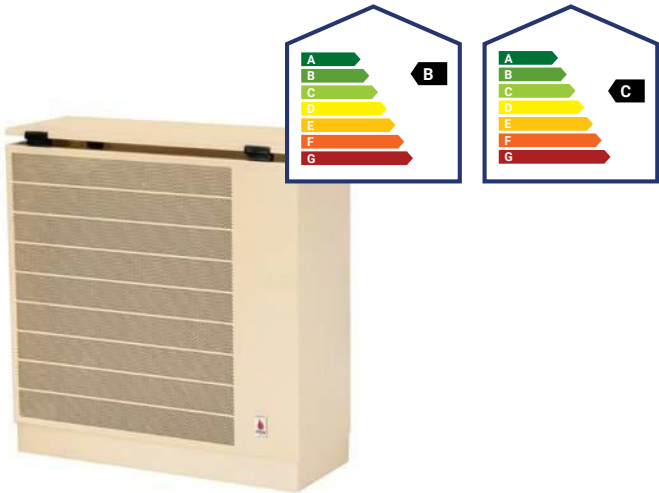


GF25 ErP WALL HEATER




Device model:		GF25F ErP		GF25P ErP	
	Fuel	Natural gas	LP gas	Natural gas	LP gas
	Max. rated heat utput	2.95	3.0	2.9	2.9
	Efficiency (%)	95	95	94	93
	Energy efficiency class:	B		C	
	Space heated (m3):	40-70			
	Height (mm)	700			
	Depth (mm)	310		395	
	Width : (mm)	500			
	Weight (kg)	20		20	
	Gas connection	G1/2"			
	Flue outlet type	direct vent		chimney.	
	Flue outlet diameter (mm)	97		76	
	Material of combustion chamber	steel			
	Colours	beige			

GF30 ErP WALL HEATER

Device model:		GF30F ErP		GF30P ErP	
 Fuel		Natural gas	LP gas	Natural gas	LP gas
 Max .rated heat output (kW)		3.0	3.1	2.9	2.9
 Efficiency		94	95	85	88
 Energy efficiency class		B		C	
 Space heated (m3):		40-70			
 Height (mm)		685		660	
 Depth (mm)		310		440	
 Width: (mm)		500			
 Weight (kg)		34		34	
 Gas connection		G1/2"			
 Flue outlet type		direct vent		chimney	
 Flue outlet diameter (mm)		97		76	
 Material of combustion chamber		casting			
 Colours		beige			

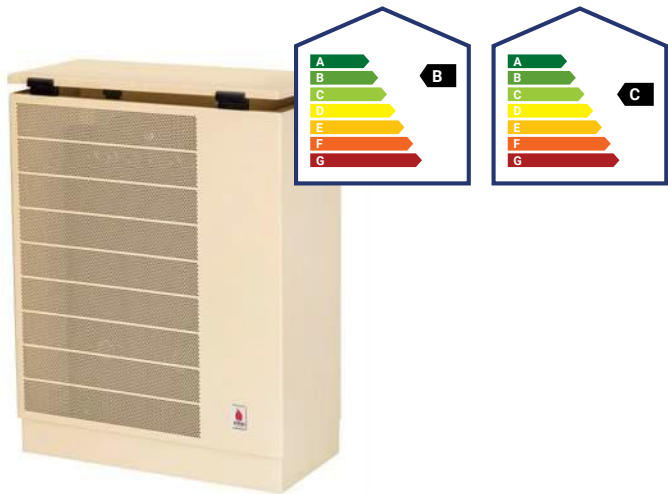


EURO FK25
WALL HEATER



Device model:	EURO FK25	
 Fuel	Natural gas	LP gas
 Max. rated heat output (KW)	2.7	2.9
 Efficiency (%):	90	91
 Energy efficienc class:	C	
 Space heated:	40-70	
 Height (mm)	810	
 Depth (mm)	183	
 Width: (mm)	392	
 Weight (kg)	16	
 Gas connection	G1/2"	
 Flue outlet type	chimney.	
 Flue outlet diameter (mm)	60	
 Material of combustion chamber	steel	
 Colours	beige, white	



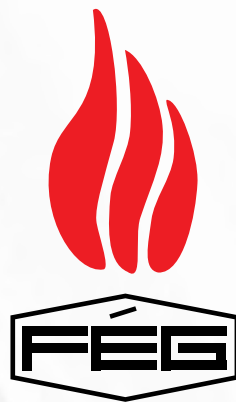

Your partner: